




T-Screen UHM4324H

Vibrant and Striking Signage

Integrate our T-Screen UHM4324H into your daily working routine and sector for seamless information delivery. Its endurance in build quality ensures continued usage throughout the day, along with various connectivity ports for easy navigation.

Toshiba's T-Screen UHM4324H is packed with all-new features while remaining reliable and up to the highest standards.

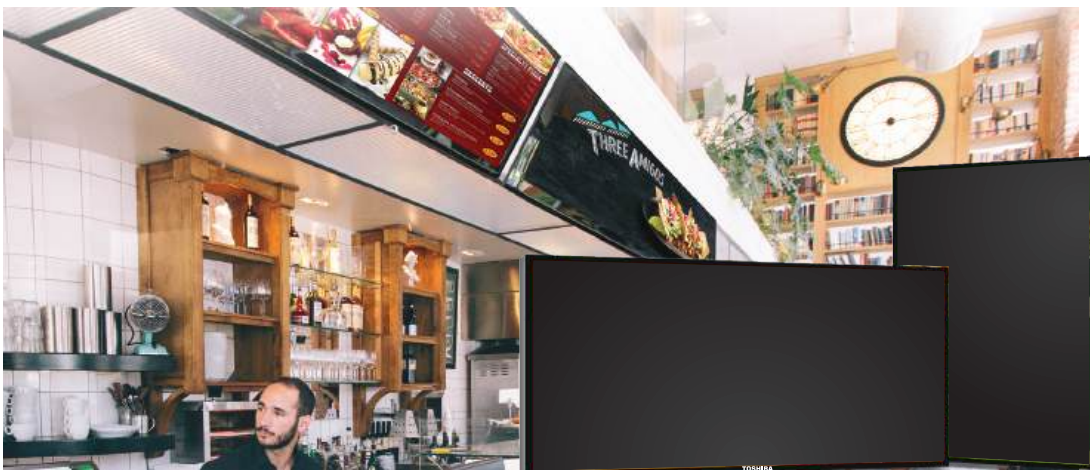

Features

- 4K UHD
- SCHEDULER
- USB AUTOPLAY

UHM4324H Specifications

Panel	Screen Size	43"
	Panel Technology	IPS
	Backlight Type	Slim DLED
	Brightness (Typical)	500 cd/m ²
	Native Resolution	3840 x 2160 (16:9) - UHD
	Contrast Ratio (Typical)	1200:1
	Dynamic Contrast Ratio	50000:1
	Response Time (Typical)	8 ms
	Active Area (H x V)	941 x 529 mm
	Pixel Pitch (H x V)	0.2451 x 0.2451 mm
	Viewing Angle	178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10
	Colour Value	1.07G (8bits + FRC)
	Screen Treatment	3H
	Haze Level	1%
	Refresh Rate	60 Hz
	Orientation	Landscape, Portrait
	Area of Usage	Indoor
Mainboard	Mainboard Model	17MB135VS
Monitor Connectivity	RGB Input	VGA (DE-15F)
	RGB Output	N/A
	Video Input	4xHDMI2.0, 2xUSB2.0, USB2.0 (Internal)
	Video Output	HDMI2.0
	Audio Input	Line In L/R
	Audio Output	Headphone, Optic SPDIF
	External Control	RS232 (DE-9F), Ethernet (RJ45), Service (RJ12)
External Sensor	RJ12	
Mechanical	Product Dimensions (W x D x H)	963 x 83 x 555 mm (with OPS/SDM) 963 x 63 x 555 mm (without OPS/SDM)
	Package Dimensions (W x D x H)	1050 x 178 x 718 mm
	Product Weight	10.4 kg
	Package Weight	13.5 kg
	Vesa Mounting	200 x 200 mm - M6
Environmental Conditions	Bezel Width	6/6/6/9 mm
	Operating Temperature	0-40°C
Power	Operating Humidity	10-90%
	Power Supply	110 VAC - 240 VAC - 50/60Hz
Power Consumption	Typical / Maximum	127 W / 160 W
	Deep Standby	≤0.5 W
Features	Main Features	Open Content Management Support, Scheduler, USB-Autoplay, Auto-Launch, HDMI-CEC, HDMI-Wakeup, Auto-switch on Failover, Panel Lock, OSD Rotation, NoSignalPowerOff, Screen Saver, Pixel shift, Scheduler, Videowall support, Remote control via LAN, Real Time Clock
	Mechanical Features	Joystick, Rocker Switch, Detachable Power Cable, Detachable Logo, Internal Usb Cover, 30-degrees Tilting Installation
	Optional Features	SDM or OPS compatibility, Embedded IR, IR extender option
	Speaker	2 x 8 W
Accessory	Standard	QSG, IB, Power Cord, Remote Control, RC Battery, Mounting Kit, IR Extender Cable
Certification	Safety	YES
	EMC	YES
	CE	YES

For more information, kindly contact us at:

Toshiba Tec Malaysia Sdn. Bhd.

Registration No.: 198101000677 (66785-D)

No. 5, Jalan Jurubina U1/18, Seksyen U1,
Hicom Glenmarie Industrial Park,
40150 Shah Alam, Selangor Darul Ehsan, Malaysia.

Tel : +603-5568 7788 Service : +603-5568 7699 Fax : +603-5568 7700
Website : www.toshibatec.com.my

Photos are for reference only, please refer to the actual products. Product design and specifications are subject to change without prior notice. All rights reserved.

Technical data is subject to change without prior notice. All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries. All rights reserved. We are constantly making efforts to deliver the latest status of data to our partners. Specifications for some models may change in the time between the production and the release of this documentation. Copyright ©2021 TOSHIBA TEC